





New Additions to Our Lineup







Hilling Position

Plowing Position

GARDEN HILLER -NOW WITH PLOW

- · Garden Hiller and Plow combination attachment
- Discs can be easily relocated to quickly change from plowing action to hilling action
- · Adjustable disc height and horizontal spacing

See Page 47







POTATO DIGGER

- Fits Cat.1 3ph tractors
- Tow-Behind Design with rear discharge
- 5 adjustable plowshare digging depths
- Adjustable sieve tine basket
- · Reverberating camshaft
- · Adjustable wheel base

See Page 48





COMMERCIAL SNOWBLOWER

- Up to 120" cutting width
- Compatible with 150HP 250HP tractors
- HD450 steel wear plates on many key elements
- Optional truck loading chute
- · Optional rotating fan housing/side discharge

See Page 15

TABLE OF CONTENTS



Snowblowers

Page 01



Commercial Snowblowers

Page 09



Loader Mounts & Power Packs

Page 15



Self Powered Snow Throwers

Page 17



3PH Rotary Cutters

Page 19



Rotary Cutters -Wing

Page 25



Skidsteer Rotary Cutters

Page 26



Extreme Duty Brush Cutters

Page 27



Finishing Mowers

Page 29



Trail/UTV Mowers

Page 30



Lawn Sweepers

Page 31



Rotary Sweepers

Page 32



3PH Box Blades

Page 33



Land Planes

Page 34



Grader Blades

Page 35



Land Levelers

Page 38



Grader Levelers

Page 39



Landscape Rakes

Page 41



Cultivators

Page 42



Track Curry

Page 43



Rotary Tillers

Page 45



Garden Hillers

Page 47



Potato Digger

Page 48



Trailer Backhoe

Page 49



Gravity Boxes

Page 51



Field Roller

Page 55



Weight Boxes

Page 57



Implement Caddy

Page 58

Single Auger Snowblowers





Models	SB48	SB54	SB60
HP (Rec.)	12 HP	15 HP	20 HP
Cutting Width	48"	54"	60"
Cutting Edge	1/4 x 1-1/2	3/8 x 1	3/8 x 1
Auger Diam.	12"	14"	14"
Fan Diam.	19"	21"	21"
Chute Diam.	7"	8"	8"
Chute Rotation (Man/Hyd)		Select Option	
Chute Deflector	Manual	Manual Standard/ Hydra	ulic Option (see pg. 12)
Main Body Height	22.5"	25"	25"
3PH Mount	Cat. 1	Cat. 1	Cat. 1
Weight (LBS.)	266	366	396





FEATURES

- 7 year limited warranty
- High tensile steel flighting
- 3PH quick attach compatible
- 5 blade fan/impeller
- Manual chute deflector

OPTIONS

- Hydraulic rotators (all models)
- Manual rotators optional on all models
- Hydraulic chute deflector

WING KITS

- Fits SB54, SB60, SB68, and SB72
- 18" tall. Made with 10 gauge steel
- Increases path 2" per side

Part #

55399



Models	SB68	SB72	SB78	SB87	SB97	
HP (Rec.)	30 HP	35 HP	50 HP	60 HP	75 HP	
Cutting Width	68"	72"	78"	87"	97"	
Cutting Edge	3/8 x 1	3/8 x 1	½ x 1-½	½ x 2	½ x 2	
Auger Diam.	14"	14"	15"	19"	19"	
Fan Diam.	21"	21"	23"	27"	27"	
Chute Diam.	10"	10"	10"	12"	12"	
Chute Rotation (Man/Hyd)			Select Option			
Chute Deflector	Manual Standard/ Hydraulic Option (see pg. 12)					
Main Body Height	25"	25"	29"	36"	36"	
3PH Mount	Cat. 1	Cat. 1	Cat. 1 & 2	Cat. 2	Cat. 2	
Weight (LBS.)	506	540	748	1,034	1,106	

Double Auger Snowblowers







FEATURES

- 5 Blade impeller
- 7 year limited warranty
- High tensile steel flighting on top and bottom augers
- Cat. 2 3PH on model SB87D
- Cat. 2 & Cat. 3 on SB97D-SB120D
- Hydraulic chute rotator standard (SB97D - SB120D)
- Manual chute deflector on all models
- Skid shoes
- Fan housings is made with AR400 steel

OPTIONS

 Optional hydraulic chute deflector on all models



SPECIFICATIONS

Models	SB87D	SB97D	SB108D		
Opt. 1000 RPM	-	Yes	Yes		
HP (Rec.)	60 HP	100 HP	125 HP		
Cutting Width	87"	97"	108"		
Cutting Edge	½ x 2	½ X 6*	½ x 6*		
Auger Diam.	15" (x2)	15" (x1) 19" (x1)	15" (x1) 19" (x1)		
Fan Diam.	27"	32"	32"		
Chute Diam.	12"	13"	13"		
Chute Rotation (Man/Hyd)	Selection Req. (Pg. 13) Hydraulic Standard				
Chute Deflector (Man/Hyd)	Manual Deflector Standard/Hydraulic Option Pg.12				
Main Body Height	36"	43"	43"		
3PH Mount	Cat. 2	Cat. 2 & 3	Cat. 2 & 3		
Weight (LBS.)	1,161	1,900	1,980		
Tube	3 ½" OD	4 1/2" OD HEAVY WALL	4 1/2" OD HEAVY WALL		
Flighting	5/16 x 2 1⁄4	5/16 x 2- ¹ / ₄	5/16 x 2-1/4		
Roller Chain	#60 Heavy	#80	#80		
Fan Depth	10"	12"	12"		
Auger Drive Shaft	1 1/4"	1-3/4"	1-3/4"		
Fan Output Shaft	40mm	2"	2"		
Fan Output Shaft	40mm	2"	2"		

Models	HP	PTO Shaft	RPM	1000 RPM Kit
SB87D	100-125	6 Spline	540	N/A
SB87DF	100-125	1 3/8" 21 spline	1000	Included
SB97D	100-125	6 Spline	540	N/A
SB97D175	125-175	6 Spline	540	N/A
SB97DF1.75	125-175	1 3/4" 20 Spline	1000	Included
SB97DF	150-200	1 3/8" 21 Spline	1000	Included
SB108D	100-125	6 Spline	540	N/A
SB108D175	125-175	6 Spline	540	N/A
SB108DF1.75	125-175	1 3/4" 20 Spline	1000	Included
SB108DF	150-200	1 3/8" 21 Spline	1000	Included

1000 RPM GEARBOX KIT

All models with "F" in the name come standard with the 1000 RPM Gearbox Kit.

The 1000 RPM Kit also raises the input shaft to allow the PTO shaft to run at a lesser angle on larger tractors increasing the efficiency and life of the driveline components. The reduction box allows you to reverse the rotation so you can mount a regular snow blower to the front of a tractor. PTO shaft not included.



Pull Type Snowblowers - Performance Series





MK Martin has completely redesigned the Pull Type Tractor Snowblower. Most notably with the redesign, the new Pull Type blower now cleans tight to the garage door, with no need for an additional back drag system. Connecting to your tractor's 3PH, the inverted snowblower allows you to drive straight forward pulling the blower instead of backing into the snow. Easier on your neck, the pull type blower is ideal for quickly clearing driveways and laneways.

TIVAR WEAR PARTS

Tivar is a wear resistant plastic that replaces steel cutting edges and bolts onto the skid shoes.

Optional on Pull Type models, the tivar is gentler when clearing, ideal for interlocking brick and decorative stone.





Skid Shoe

Cutting Edge

Part #	Tivar Kit
SB54PTTK	Cutting Edge & Skid Shoes
SB60PTTK	Cutting Edge & Skid Shoes
SB68PTTK	Cutting Edge & Skid Shoes
SB72PTTK	Cutting Edge & Skid Shoes
SB78PTTK	Cutting Edge & Skid Shoes
SB87PTTK	Cutting Edge & Skid Shoes
SB97PTTK	Cutting Edge & Skid Shoes





FEATURES

- Cleans tight to the garage door
- 5 blade impeller
- 7 year limited warranty
- High tensile steel flighting
- Multi-hinged deflector (SB68P/T SB97P/T)

OPTIONS

- Manual Rotator
- Hydraulic and electric chute rotators
- Hydraulic chute deflectors
- Tivar contact surfaces


Models	SB54PT-P	SB60PT-P	SB68PT-P	SB72PT-P	SB78PT-P	SB87PT-P	SB97PT-P
HP (Rec.)	25 HP	25 HP	35 HP	35 HP	50 HP	60 HP	60 HP
Cutting Width	54"	60"	68"	72"	78"	87"	97"
Cutting Edge				Bolt On (1/2 x 4)			
Auger Diam.	14"	14"	14"	14"	15"	15"	15"
Fan Diam.	21"	21"	21"	21"	23"	27"	27"
Chute Diam.	8"	8"	10"	10"	10"	12"	12"
Chute Rotation	Must select either Hydraulic (opt.) or Electric (opt.) or Manual (opt.)						
Chute Deflector		Manual Std	./Opt. 6" cyl.		Ma	nual Std./Opt. 8" (cyl.
Double Hood Deflector	N/A	N/A	Std.	Std.	Std.	Std.	Std.
Main Body Height	23"	23"	23"	23"	26"	28"	28"
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1 & 2	Cat. 2	Cat. 2
Weight (LBS.)	462	495	671	685	900	1,175	1,260
Tube Size	2 3/8" OD	2 3/8" OD	2 3/8" OD	2 3/8" OD	3 ½" OD	3 ½" OD	3 ½" OD
Flighting Size	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	5/16 x 2 1/4	5/16 x 2 1/4
Roller Chain Drive	# 50	# 50	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy
Fan Depth	5"	5"	7"	7"	8"	10"	10"
Blades Per Fan	5	5	5	5	5	5	5
Auger Drive Shaft Size	1"	1"	1 1/4"	1 1/4"	1 1⁄4"	1 1⁄4"	1 1/4"
Fan Output Shaft Size	1 3/8"	1 3/8"	1 3/8"	1 3/8"	40mm	40mm	40mm

Pull Type Snowblowers





	ODE 4 D/T	0000 D/T	ODGG D/T	0070 D/T	0070 D/T	0007.D/T	0007 D.T
Models	SB54 P/T	SB60 P/T	SB68 P/T	SB72 P/T	SB78 P/T	SB87 P/T	SB97 P/T
HP (Rec.)	25 HP	25 HP	35 HP	35 HP	50 HP	60 HP	60 HP
Cutting Width	54"	60"	68"	72"	78"	87"	97"
Cutting Edge				Bolt On (1/2 x 4)			
Auger Diam.	14"	14"	14"	14"	15"	19"	19"
Fan Diam.	21"	21"	21"	21"	23"	27"	27"
Chute Diam.	8"	8"	10"	10"	10"	12"	12"
Chute Rotation		Must	select either Manu	al (opt.) or Hydraul	ic (opt.) or Electric	(opt.)	
Chute Deflector		Manual Std	./Opt. 6" cyl.		Ma	anual Std./Opt. 8" o	cyl.
Double Hood Deflector	N/A	N/A	Std.	Std.	Std.	Std.	Std.
Main Body Height	25"	25"	25"	25"	28"	32-1/2"	32-1/2"
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1	Cat. 1 & 2	Cat. 2	Cat. 2
Weight (LBS.)	462	495	671	685	900	1,175	1,225
Tube Size	2 3/8" OD	2 3/8" OD	2 3/8" OD	2 3/8" OD	3 ½" OD	3 ½" OD	3 ½" OD
Flighting Size	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	1/4 x 2 1/4	5/16 x 2 ½	5/16 x 2 1/4
Roller Chain Drive	# 50	# 50	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy	# 60 Heavy
Fan Depth	5"	5"	7"	7"	8"	10"	10"
Blades Per Fan	5	5	5	5	5	5	5
Auger Drive Shaft Size	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 1⁄4"	1 1/4"
Fan Output Shaft Size	1 3/8"	1 3/8"	1 3/8"	1 3/8"	40mm	40mm	40mm

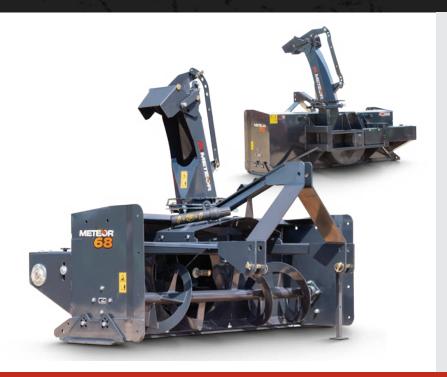

FEATURES

- 5 blade impeller
- 7 year limited warranty
- High tensile steel flighting
- Standard manual chute deflector (all)
- Multi-hinged deflector (SB68P/T SB97P/T)

OPTIONS

- · Hydraulic, manual and electric chute rotators
- · Hydraulic chute deflectors
- Back drag (manual or hydraulic)
- · Tivar contact surfaces

BACK DRAG

Optional back drags are manual chain adjustment, and can be upgraded to a hydraulic option for 68" and wider models.





TIVAR WEAR PARTS

Tivar is a wear resistant plastic that replaces steel cutting edges and bolts onto the skid shoes.

Optional on Pull Type models, the tivar is gentler when clearing, ideal for interlocking brick and decorative stone.





Skid Shoe

Cutting Edge

WING KITS

- 18" tall. Made with 10 gauge steel
- Increases path 2" per side

Part #	
60962	Fits SB54, SB60, SB68, SB72
60963	Fits SB78, SB87, SB97



Back Drag	Lift Type
SB54PTRB	Man.
SB60PTRB	Man.
SB68PTRB17	Man. / Hyd.
SB72PTRB	Man. / Hyd.
SB78PTRB17	Man. / Hyd.
SB87PTRB17	Man. / Hyd.
SB97PTRB	Man. / Hyd.
Ontional Hydraulic Kit	(fite SR68PT - SR07PT)


Optional Hydraulic Kit (fits SB68PT - SB97PT) SBPTRBH17

Part #	Tivar Kit
SB54PTTK	Cutting Edge & Skid Shoes
SB60PTTK	Cutting Edge & Skid Shoes
SB68PTTK	Cutting Edge & Skid Shoes
SB72PTTK	Cutting Edge & Skid Shoes
SB78PTTK	Cutting Edge & Skid Shoes
SB87PTTK	Cutting Edge & Skid Shoes
SB97PTTK	Cutting Edge & Skid Shoes
Back Drag Part #	Tivar Kit
SB54PTBDTK	Back Drag
SB60PTBDTK	Back Drag
SB68PTBDTK	Back Drag
SB72PTBDTK	Back Drag
SB78PTBDTK	Back Drag
SB87PTBDTK	Back Drag

Back Drag

SB97PTBDTK

4000 SERIES Commercial Snowblowers

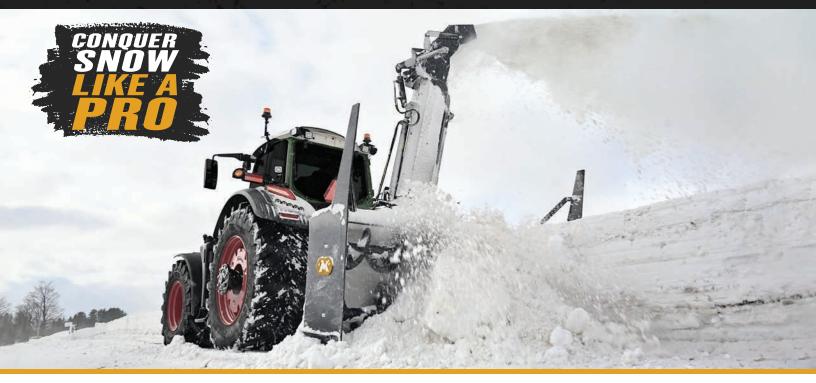

FEATURES



6 BLADE FAN



TWIN AUGER CHAIN DRIVE



HYDRAULIC CHUTE & MULTI-HINGE DEFLECTOR



OIL CHAIN BATH

OPTIONS



ROTATING FAN HOUSING / SIDE DISCHARGE



TRUCK LOADING CHUTE




BANK CUTTERS

Part # SB120TLC







SHEAR BOLT PROTECTION

FEATURES

- 6-Blade Fan
- Twin Auger Chain Drive
- Hydraulic Chute & Multi-Hinge Deflector
- Chain is fully enclosed in oil bath
- Heat Treated Cutting Edge
- Shear Bolt Protection
- Dual Augers with Ribbon Flighting
- Adjustable Skid Shoes

SPECIFICATIONS

Models	SBR4097	SBR4108	SBR4120			
HP (Rec.)	150-250	150-250	150-250			
Cutting Width	97"	108"	120"			
Main Body Height	47"	47"	47"			
Mount	CAT. 2 & 3	CAT. 2 & 3	CAT. 2 & 3			
Impeller (Fan)		36" - 3/8" HD 450 Steel				
Impeller Depth	12"	12"	12"			
Impeller Blades	6	6	6			
Impeller Output Shaft	2-1/2"	2-1/2"	2-1/2"			
Rotating Housing	N/A	N/A	N/A			
PTO Drive (RPM)	1,000	1,000	1,000			
Stages	2 2 2					
Rotor	Ribbon Flighting (Flight Notching Available)					
Rotor (Tube)	4-1/2" OD Heavy Wall					
Rotor (Flighting)	1/2" x 3" (Bottom) 5/16" x 2-1/4" (Top)					
Rotor (Diameter)	23" (Bottom) 15" (Top)					
Rotor (Drive Shaft)	1-3/4" 1-3/4" 1-3		1-3/4"			
Roller Chain	#100	#100	#100			
Cutting Edge	3/	'4" x 6" Bolt on Cutting Ed	ge			
End Plates	3/8" HD 450 Steel x 48" High					
Chute Diameter	13"	13"	13"			
Chute Rotator	Hydraulic	Hydraulic	Hydraulic			
Deflector Stages	2	2	2			
Chute Deflector	Hydraulic	Hydraulic	Hydraulic			
Weight (LBS.)	3,230	3,350	3,485			

RH Models*	SBR4097RH	SBR4108RH	SBR4120RH
Rotating Housing	Standard	Standard	Standard
Weight (LBS.)	3,490	3,610	3,745

^{*} RH models have the same specs as the corresponding models above, however they include a rotating fan housing.



SCAN OR CODE TO SEE THE COMMERCIAL SNOWBLOWER IN ACTION

Snowblower Options





CHUTE ROTATOR

Meteor Snow Blower chute rotators come in manual (crank), hydraulic (orbital motor), and electric.



Manual

Part #	Description		
SB48MR25	Fits 48" model		
SB60MR25	Fits 54" and 60" models		
SB68MR25	Fits 68" and 72" models		
SB78MR25	Fits 78" models		
SB87MR25	Fits 87s, 97s, 87D models		
SB60PTMR25	Fits 60" Pull Type		
SB68PTMR25	Fits 68" and 72" Pull Type		
SB78PTMR25	Fits 78" Pull Type		
SB87PTMR25	Fits 87" Pull Type		
SB97PTMR25	Fits 97" Pull Type		
SB54PT-PMR25	Fits 54" Performance Pull Type		
SB60PT-PMR25	Fits 60" Performance Pull Type		
SB68PT-PMR25	Fits 68" Performance Pull Type		
SB72PT-PMR25	Fits 72" Performance Pull Type		
SB78PT-PMR25	Fits 78" Performance Pull Type		



Hydraulic

Part #	
SBHR13	



Electric

Part #	
SBER13	



HYDRAULIC DEFLECTOR

Hydraulic chute deflector includes the cylinder and the hoses.

Part #	Applicable Models	
SB68HD	Fits 54-72	
SB75HD	Fits 78-120	



MULTI-HINGED DEFLECTOR

Meteor's Multi-Hinged Deflector provides you with finer control over where your snow is blown. Cylinder not included.

Part #	Applicable Models	
SB78MHD	Fits 78	
SB87MHD13	Fits 87-87D-97	
SB108MHD	Fits 97D-120D	

TRUCK LOADING CHUTE

- Provides up to 40" of additional Height
- Hydraulic Rotation
- Hydraulic Multi-Hinged Deflector

Part #	Applicable Models	
SB87TLC	87S, 97S, & 87D	
SB108TLC	97D & 108D	
SB120TLC	120D	



Skidsteer Snowblowers







FEATURES

- Adjustable blower fan tolerance for increased performance
- · Auger has new teeth
- New curved exit chute for a more direct stream
- 5 blade impeller
- · Direct fan drive mounted
- Up To 4439 ft/min fan tip speed
- · Pivoting hitch plate
- · Hitch plate height adjustable
- Solid side plate construction for added strength and rigidity
- Offset chute for better operator vision
- Hydraulic line check valve allow overrun and prevents reverse rotation
- Solenoid valve feature allows for use of hydraulic rotator motor and hydraulic deflector
- Fan housings is made with AR400 steel

OPTIONS

- Available with ALO or JD mount
- Hydraulic chute deflector
- Optional wiring kit adapters for skid loader control integration
- · Optional multi hinge deflector
- Optional poly edge for skid shoes



SPECIFICATIONS

Models	SSB62	SSB66	SSB76	SSB86	SSB96
Cutting Edge (Bolt-On)	½ x 4	½ x 4	½ x 4	½ x 4	½ x 4
Cutting Width	62"	66"	76"	86"	96"
Auger Tube			3 ½" Round		
Auger Flighting			5/16 x 2 1/4		
Auger Diam.			19"		
GPM (min)	14	14	14	23	33
Mounting			Universal Skidsteer Attach		
Chute Rotation			Hydraulic		
Chute Diam.			10"		
Main Body Height			27 ½"		
Chute Deflector			Manual Std/Hydraulic Opt		
Fan Diam.		24"			26"
Fan Depth			8"		
Weight (LBS.)	910	928	970	1000	1,085

HP*	Code
22	Α
27	В
30	B+
35	С
43	C+
52	D
	22 27 30 35 43

*HP calculated at 2500 PSI Code "D" high flow package is recommended on the SSB 96.

HYDRAULIC DEFLECTOR KIT

Part #	Description
SSB75HD	Hydraulic Deflector Kit

WIRING KITS

Optional Wiring Kits	Description
SSBEWK 7-Bobcat	7 Pin Wire Kit
SSBEK 8Cat	8 pin wire kit
SSBEK 8 Terrex	8 Pin Wire Kit
SSBEK 14Gehl/Case/NH/JCB/Volvo	14 Pin Wire Kit
SSBEK 14JD	14 Pin Wire Kit
SSBEWK-KU/Kubota/Wacker Neuson	14 Pin Wire Kit

^{*}Wacker Neuson standard & high flow

Loader Mount Snowblowers & Power Packs





Models	SSB66	SSB76	SSB86
Cutting Edge (Bolt-On)	½ x 4	½ x 4	½ x 4
Cutting Width	66"	76"	86"
Auger Tube		3 ½" Round	
Auger Flighting	5/16 x 2 1⁄4		
Auger Diam.	19"		
GPM	30		
Mounting	Universal Skidsteer Attach		
Chute Rotation	Hydraulic		
Chute Diam.	10"		
Main Body Height		27 ½"	
Chute Deflector		Manual Std/Hydraulic Opt	
Fan Diam.		24"	26"
Fan Depth		8"	
Weight (LBS.)*	928	970	1000

^{*} Weight includes snowblower only.



FEATURES

- Hydraulic Chute Rotation
- Hydraulic Chute Deflector

Available with the following quick tach:

(Must be specified at time of order)

- Universal skidsteer
- Euro (ALO)
- JD 440/540 combination

POWER PACKS

- 3PH Mount PTO
- 30 Gal. Capacity
- 2,500 PSI at 30 Gallons per Minute
- SBLMPP-30 can be run for up to 2-hours before cool down is required





Models	SBLMPP-30	SBLMPPCS-30
Recommended HP	40-60HP	40-60HP
Capacity (gallons)	30	30
Flow Rate (PSI)	30 GPM/2500 PSI	30 GPM/2500 PSI
Mount	3PH	3PH
Weight	535 LBS.	575 LBS.
Height	48"	48"
Width	39"	39"
Depth	30"	32"
Max Operating Temp. (°C)	2° C	30° C
Max Operating Time (hours)	2 Hour Duty Cycle	Full Duty Cycle
Cooling System Included	No	Yes

Self Powered Snow Throwers





FEATURES

For tractors and compact skid loaders without hydraulic remotes, MK Martin offers our self powered snow thrower.

While being easy to attach with no drive lines or hoses to worry about, the engine belt drives the shaft which transfers power to the rotor by a roller chain.

These self powered snow throwers are ideal for moving snow quickly with precision in mind. The flared body opening helps to cut snow and direct to the efficient rotor assembly.

SPECIFICATIONS

Model	SBRS1054E SBRS1060E			
Motor Type	Vanguard 14HP Vanguard 14H			
Electric Start	12 Volt 12 Volt			
Clutch	Electric (start/stop blower)			
Rotor	16" @ 750 RPM			
Hood Rotator	Electric Electric			
Hood Deflector	Manual Manual			
Cutting Edge	Bolt on 1/4" x 3-1/2"			
Overall Width	54" 60"			
Overall Depth	36" 36"			
Main Body Height	22.75" 22.75"			
Weight	470 lbs. 545 lb.			

Part #	Description
SBR1000JDMount	JD Mount Option

WIRED REMOTE

The wired controller allows for remote starting and stopping of the rotor.

Oversized buttons allows operators to make quick and accurate adjustment of the chute rotation.





Bobcat/Ventrac/Steiner Snowblowers





FEATURES

- Designed to fit Bobcat, Ventrac and Steiner articulating tractors
- · Hydraulic chute rotation for smooth blowing
- · Ideal for rural driveways and smaller commercial yards
- Compatible with:





Bobcat. Nentrac

SPECIFICATIONS

Models	SBVEN48	SBVEN54			
Cutting width	48" 54"				
Cutting Edge	3/8 x 1"				
Auger Diam.	14"				
Fan Diam.	21"				
Chute Diam.	8"				
Chute Rotation	Hyd.				
Chute Deflector	Manual				
Body Height	25"				
Drive	Belt drive				
Mount	Bobcat/Ventrac/Steiner				
Weight (LBS.)	475 488				







BELT DRIVE

HYDRAULIC CHUTE ROTATE

STEINER/VENTRAC/ **BOBCAT MOUNT**

3PH Rotary Cutters







FEATURES

- Maximum brush diameter 1"
- 7 year limited warranty
- Cat. 1 3PH
- Adjustable cutting height 2" 10"
- Floating top link maintains cutting height
- Solid segmented wheels for no flat running
- 2 blade design
- Standard front and rear rubber guards
- Deck protection ring
- Fixed skid shoe

OPTIONS

- Light duty slip clutch for driveline protection
- Chain curtains
- Rubber guard

SPECIFICATIONS

Model	PRC48LD	PRC48	PRC54	PRC60	PRC66	PRC72	PRC72HD
Shipping Weight (LBS.)	320	380	430	500	560	625	635
3PH Mount	Cat. 1	Cat. 1					
Cutting Height	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"
Cutting Path	48"	48"	54"	60"	66"	72"	72"
Max Brush Diameter	1"	1"	1"	1"	1"	1"	1"
Tip Speed (Ft/Min)	13100	13100	14725	12462	13708	14955	14955
Wheels	16" (Air Filled)	16" (Segmented)					
Blades	½" x 3"	½" x 3"					
Tractor HP (min)	20	20	22	30	40	50	50
PTO RPM	540	540	540	540	540	540	540
Gearbox Rating	40	40	40	60*	60*	60*	75*
Deck	12 ga	12 ga					
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Rubber Guard	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Protection (Std./Opt.)	Shear Pin / Slip Clutch	Slip Clutch (Std.)					

^{*} Based on field performance



Chain Guards

Part # (Chain)	
PRC48CHAIN16	Ī
PRC54CHAIN	
PRC60CHAIN16	
PRC66CHAIN16	
PRC72CHAIN16	

Includes both front and back chains.



Slip Clutch

Part #	Description
PRCSC	Optional Light Duty Slip Clutch



Rubber Guard kit

Part #	Description
RC48RB	Rubber Guard option for 48" PRC/MKRC
RC54RB	Rubber Guard option for 54" PRC/MKRC
RC60RB	Rubber Guard option for 60" PRC/MKRC
RC66RB	Rubber Guard option for 66" PRC/MKRC
RC72RB	Rubber Guard option for 72" PRC/MKRC

3PH Rotary Cutters - 700 Series







FEATURES

- 7" Deck Height
- Maximum brush diameter 2"
- 7 year limited warranty
- Cat. 1 3PH
- Adjustable cutting height 1.5" 13"
- Floating top link
- · Solid segmented wheels
- 2 blade design with stump jumper
- Standard front and rear rubber guards
- Deck protection ring
- Stump jumper
- Fixed skid shoe

OPTIONS

- Light duty slip clutch for driveline protection
- Chain curtains



SPECIFICATIONS

Model	MKRC748	MKRC760	MKRC766	MKRC772	MKRC772HD	MKRC784HD
Cut Width	48"	60"	66"	72"	72"	84"
Weight (LBS.)	420	535	605	640	730	840
Hitch			Cat. 1 Quick Hi	itch Compatible		
Cutting Height			1.5" - 13" /	10 Positions		
Max Brush Diameter			2)" -		
Tip Speed (Ft/Min)	13100	12462	13708	14955	15260	17803
Wheels		16" Seg	gmented			X2
Blades		1/2"	x 3"			
Tractor HP (min)	22	30	40	50	50	60
PTO RPM	540 RPM	540 RPM	540 RPM	540 RPM		
Gearbox Rating *	40	60	60	60	75	75
Deck	10 ga	10 ga	10 ga	10 ga	10 ga	10 ga
Deck Height	7"	7"	7"	7"	7"	7"
Skirt Thickness	3/16"	3/16"	3/16"	3/16"	3/16"	3/16"
Stump Jumper	Yes (Round)	Yes (Round)	Yes (Round)	Yes (Round)		
Rubber Guard	Std.	Std.	Std.	Std.	Std.	Std.
Protection	Shear Pin	Shear Pin	Shear Pin	Shear Pin	Slip Clutch	Slip Clutch





Chain Guards Includes both front and back chains.

Part # (Chain)
PRC48CHAIN16
PRC60CHAIN16
PRC66CHAIN16
PRC72CHAIN16
PRC84CHAIN16




Slip Clutch

Part #	Description
PRCSC	Optional Light Duty Slip Clutch

3PH Rotary Cutters Plus



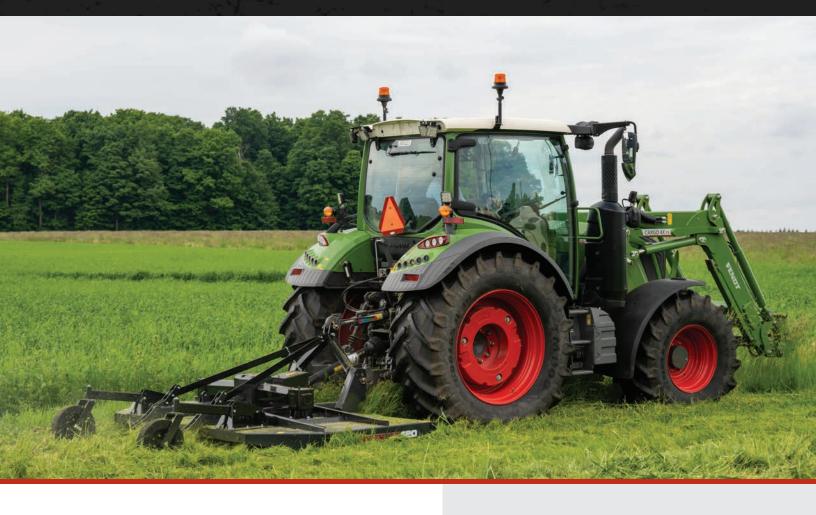



FEATURES

- Maximum brush diameter 2"
- 7 year limited warranty
- Cat. 1 & Cat. 2 3PH
- Draw bar hitch (PRCPLUS120)
- Adjustable cutting height 2" 10"
- Floating top link maintains cutting height
- Solid segmented wheels (PRCPLUS60 – PRCPLUS96)
- Pneumatic wheels (PRCPLUS120)
- 3 blade design with stump jumper
- Standard front and rear rubber guards
- · Deck protection ring
- Slip clutch to protect the drive line
- · Bolt on skid shoe

OPTIONS

· Chain curtains

Blade Assembly



Floating Top Link



Segmented Wheel



Slip Clutch



SPECIFICATIONS

Model	PRCPLUS60	PRCPLUS72	PRCPLUS84	PRCPLUS96	PRCPLUS120	PRCPLUS120-3PH
Shipping Weight (LBS.)	595	775	1045	1530	2320	2045
Hitch Type		Cat. 1 & 2 Quick	Tach compatible		Draw Bar Hitch	Cat. 2
Cutting Height	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"	2" - 10"
Cutting Path	60"	72"	84"	96"	120"	120"
Max Brush Diameter	2"	2"	2"	2"	2"	2"
Tip Speed (Ft/Min)	12,462	15,260	17,803	16,500	14,500	14,500
Wheel Type (Qty.)	16" Segmented (1)	16" Segmented (1)	16" Segmented (2)	16" Segmented (2)	16" Pneumatic (2)	16" Pneumatic (2)
Blades	3 - ½" x 3"	6 - ½" x 4"	6 - ½" x 4"			
Tractor HP (min)	30-40	60	60	80	80	80
PTO RPM	540	540	540	540	540	540
Gearbox Rating *	75 HP	75 HP	90 HP	100 HP	120 HP	120 HP
Deck	3/16"	3/16"	3/16"	3/16"	9GA	9GA
Stump Jumper	Yes	Yes	Yes	Yes	Yes	Yes
Protection	Slip Clutch					

^{*} Based on field performance





CHAIN GUARDS

GUARDS Includes both front and back chains.

Part # (Chain)
PRC60CHAIN16
PRC72CHAIN16
PRC84CHAIN16
PRC96CHAIN16
PRC120CHAIN

DRAW BAR KIT

For 84" & 96" models. Kit consists of components shown in black in this image; red components for illustration only.

Part #	
PRCDB84-96	

Rotary Cutters - Wing





FEATURES

- 15' dual wing rotary cutter
- 4 heavy duty gearboxes, each covered with 7 year limited warranty
- Transport lock for each wing
- 1.5" diameter cutting capacity
- Each wing can float to conform to ground contours





Model	PW180
Shipping Weight (LBS.)	4,400
3PH Mount	Draw Bar Hitch
Cutting Height	3"-15"
Cutting Path	180"
Max Brush Diameter	1.5"
Overall Width (Wings Down)	184"
Folded Width (Wings Up)	78"
Tip Speed (Ft/Min)	15,100 ft/min on Wings 14,850 ft/min on center
Wheels (Pneumatic)	21"
Blades	9 blades ½"x4"
Tractor HP (min)	75HP
PTO RPM	540
Gearbox Rating (Wing)	140 HP
Gearbox Rating (Center)	105 HP
Gearbox Rating (Divider)	87 HP
Deck	3/16"
Stump Jumper	Yes
Protection	Independent Slip Clutch on Each Spindle
Wing Float Range(degrees)	20 down and 33 up

Model	Description
PW180SP	Straight Axle with 6 Pneumatic Tires
PW180SS	Straight Axle with 6 Solid Tires
PW180TP	Walking Tandem Axle with 8 Pneumatic Tires
PW180TS	Walking Tandem Axle with 8 Solid Tires

Skidsteer Rotary Cutters







SPECIFICATIONS

FEATURES

- Maximum brush diameter 2"
- 3 blade cutting assembly
- Integrated push bar
- Relief valve for protection
- Chain curtain
- Floating linkage allows the cutter to follow ground contour
- · Deck protection ring

Model	Description	Brush Diameter	Deck Thickness	Weight (LBS.)
PRCH60-A	60" Rotary Cutter	2"	3/16"	760
PRCH60-B	60" Rotary Cutter	2"	3/16"	760
PRCH60-B+	60" Rotary Cutter	2"	3/16"	760
PRCH72-A	72" Rotary Cutter	2"	3/16"	860
PRCH72-B	72" Rotary Cutter	2"	3/16"	860
PRCH72-B+	72" Rotary Cutter	2"	3/16"	860
PRCH72-C	72" Rotary Cutter	2"	3/16"	860
PRCH72-C+	72" Rotary Cutter	2"	3/16"	860
PRCH72-D	72" Rotary Cutter	2"	3/16"	860



Flow Rates	Pack. Codes
14-17 GPM	А
18-20 GPM	В
20-22 GPM	B+
23-26 GPM	С
27-33 GPM	C+
33-40 GPM	D

To ensure optimum performance, hydraulic output must match motor package.

OPTIONAL BOLT-ON GAUGE WHEEL



- 16" segmented wheel
- 2"-9" wheel adjustment /5 holes



Extreme Duty Brush Cutters








DIRECT MOUNTED MOTOR

The hydraulic radial piston direct mounted motor and heavy duty bearing assembly deliver tip speeds of up to 20,000 ft. per minute and produce powerful torque at lower speeds for continuous cutting and faster recovery.



REVERSIBLE FRONT PUSH BAR

One side (A) has aggressive teeth for accurate pushing and directional control of larger trees. The reverse side (B) is smooth, intended for flattening dense underbrush.



HEAVY DUTY 10" CUT CAPACITY

Easily power though dense brush, woody vegetation even 10 inch diameter trees across fields, forests and trails.



4 REPLACEABLE FLAIL KNIVES

Mounted on the rotor are 4 replaceable pivoting flail knives designed to deliver maximum centrifugal velocity and shear force on every rotation.



HEAVY DUTY 1" THICK ROTOR

78" diameter oversized rotor is manufactured using a 1" thick steel plate.



FEATURES

- 78" Brush Cutter Skid Steer attachment
 - 86.5" Machine Width
- 10" cut capacity
- Radial Piston Motor (4 pkgs up to 40GPM)
 - Recommend 20+GPM
 - Higher Torque capability at low speeds
 - Up to 4000psi operating pressure
- Heavy duty 1" cutting bar; 4 cutting blades
 - Optional bolt-on inserts
- Tip speed of 20,000 ft/min
- 1/4" deck thickness
- · Replaceable skid shoes
- 2200 LBS approximate weight
- Reversible push bar (trees/brush/grass)
- 7 year limited consumer warranty
 1 year limited commercial warranty



OPTIONAL BOLT-ON MULCHING KNIVES

Bolt-on mulching knives go on the bottom of the rotor to effortlessly mulch though stumps and logs.



OPTIONAL CARBIDE CHIPPER KNIVES

Another option for mulching stumps and logs are the optional carbide tipped mulching knives.

SPECIFICATIONS

Model	BCH78XD	
Description	78" Brush Cutter	
Machine Width	86.5"	
Cutting Path	78"	
Max Brush Diameter	10"	
Radial Piston Motor	4 pkgs up to 40GPM	
Recommended GPM	20+GPM	
Torque	Higher Torque capability at low speeds	
Operating Pressure	Up to 4000 psi	
Blades	4 blades	
Heavy Duty Cutting Bar	1"	
Tip Speed	20,000 ft/min	
Deck Thickness	1/4"	
Shipping Weight (LBS.)	2,200	

OPTIONS

Part

BCH78XD-BK - BOLT ON MULCHING KNIFE KIT BCH78XD-MK - CARBIDE TIP CHIPPER KNIFE KIT

MOTOR OPTIONS

Part #	
A - 14-20GPM	
B - 20-26 GPM	
C - 26-33 GPM	
D - 33-40 GPM	

Finishing Mowers







FEATURES

- 7 year limited warranty
- Cat. 1 hitch
- 4 solid rubber tires
- Floating end link
- Taper lock pulleys
- Solid scalp roller

Model	PFM48RD	PFM60RD	PFM72RD	PFM90RD
Cutting Width	48"	60"	72"	90"
Overall Width	50"	62"	74"	93"
Weight (LBS.)	370	435	525	714
Acres/Hr@5 MPH	2.43	3.03	3.63	4.57
HP Required	14/20	20/25	25/30	30/40
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1
RPM @ PTO Shaft	540	540	540	540
Number of Blades	3	3	3	5
Tip Speed (Ft/Min)	15,660	18,000	16,850	16,288
Wheels	Solid Rubber Wheel	Solid Rubber Wheel	Solid Rubber Wheel	Solid
Deck Thickness	10 GA	10 GA	3/16"	3/16"
Cutting Height	2" - 5"	2" - 5"	2" - 5"	2" - 5"

Trail/UTV Mowers





FEATURES

- 44" 48" Cutting Width
- Briggs & Stratton Engines
- 12 Volt electric start
- Remote e-Stop
- 2 Rotors with 3 blades each
- Adjustable cutting height (2"-7") with ratchet style adjustment
- 3 position hitch for straight or offset cutting
- Flat free tires
- Swivel wheels on front, fixed wheels on rear



SPECIFICATIONS

Model	PTM48
Engine Brand	Briggs & Stratton
Engine	19 HP
Starting System	Key (electric)
Fuel Tank	3 Gal.
Battery	12 Volt
Deck	Rear Discharge
Deck Thickness	10 ga
Blade Assembly	2 Rotors with 3 Blades each
Cut Width	44"
Cut Height	2" - 7"
Max Brush Diameter	3⁄4"
Wheels	12" x 3.5" Flat free tires
Weight	720 lbs



REMOTE E-STOP

Cabled e-Stop can be placed on tow vehicle for easy reach.

Lawn Sweepers





FEATURES

- Electrically Controlled Poly Broom with Remote
- Leaf Bucket with Pivot for Easy **Emptying**
- Replaceable Durable Mesh Netting
- Flat Free Tires
- 6.5 HP Vanguard Engine

ELECTRIC DUMP OPTION

Simply back up to your compost pile and dump your load using electronic controls.

Part #	
MKLSEDL	



HEIGHT ADJUSTMENT

Height Adjustment is controlled with a switch box with a magnetic base for easy mounting to your tow unit.

Model	MKLS1846
Sweeping Width	46"
Overall Width	65"
Length	95"
Motor (HP)	6.5 HP Vanguard Engine
Brush Diameter	19"
Drive System	Chain - Fully Engaged so the brush turns all the time
Broom Lift	12V Electric
Hopper Capacity	21 Cu.Ft.
Wheels	12" x 3.5" flat free tires
Weight (LBS.)	515

Rotary Sweepers





Model	MKCS1960H - Hydraulic Drive	MKCS1960 - Gas Engine	
Motor	8-12 GPM	6.5 HP Vanguard Engine	
Sweeping Width	60"	60"	
Overall Width	64 ½"	64 ½"	
Brush Diameter	19"	19"	
Drive System	Chain- Fully engaged so the brush turns all the time	Chain- Fully engaged so the brush turns all the time	
Lateral Swivel	3°	3°	
Sweeping Angle	30° on each side	30° on each side	
Angling Options	Manual (std), Hydraulic (optional), Electrical Actuator(optional)		
Sweep Length @ 30°	54 1⁄4"	54 1/4"	
Wheels	6" x 2" Caster Wheels	6" x 2" Caster Wheels	
Weight	455 lbs. approx. 455 lbs. approx.		
Mounting Options	SS Quick Attach (Standard), JD Loader Mount, ALO Quick Attach, TORO-DINGO Plate (Available)		

OPTIONS

Part #	Description
62799	Hydraulic Angling
62800	Electric Angling

MOUNT OPTIONS

Part #	Description
55410	Standard Skidsteer Plate
55420	ALO/Euro Mount
56020	JD 440/550 Q-tach
56483	Avant Mount
56488	Toro/Dingo Mount

3PH Box Blades





FEATURES

- Reversible Hardened Steel Cutting Edges
- 2 Cutting Edges allow you push or pull material
- Height Adjustable Ripper Shanks
- Bolt On 3PH Design
- · Quick hitch compatible



Model	Width	Shanks	Mouldboard	End Plates	3PH Mount	Max HP	Weight (LBS.)
BB448STD	4'	4	3/16"	1/4"	Cat. 1	35 HP	308
BB454STD	4'6"	4	3/16"	1/4"	Cat. 1	35 HP	340
BB560STD	5'	4	3/16"	1/4"	Cat. 1	35 HP	348
BB566HD	5'6"	4	3/16"	1/4"	Cat. 1	45 HP	415
BB672HD	6'	5	3/16"	1/4"	Cat. 1	45 HP	450
BB784HD	7'	6	3/16"	1/4"	Cat. 1	45 HP	500
BB784DLX	7'	6	1/4"	1/4"	Cat. 2	75 HP	555
BB896DLX	8'	7	1/4"	1/4"	Cat. 2	75 HP	612

HEIGHT ADJUSTABLE

The height adjustable scarifier shanks break up the soil allowing the cutting edge to redistribute the material as the box scraper is pulled along.



REPLACEABLE SCARIFIER TIPS

Control how deep the scarifier rips with the Box Scrapers easy to use pin adjustment on the shanks. Removable shanks feature replaceable scarifier tips.

Replaceable Scarifier Tips on removable shanks.



Land Planes







FEATURES

- Two ½" x 6" Reversible Cutting Edges
- 3/8" x 2 Reversible Skid Shoes
- Cutting Edges are adjustable in 1" increments for optimal performance
- Hydraulically adjustable scarifier bar
- Grader quality shanks with replaceable tips
- Order Mount separately (3PH or Skidsteer Adapter)
- AR400 Abrasion-Resistant Skid Shoes

OPTIONS

 Mount – Select the correct mount for application at time of order

SPECIFICATIONS

Model	MKLP678	MKLP778	MKLP878		
Working Width	72"	84"	96"		
Overall Width	77"	89"	101"		
Length	69.5"	69.5"	69.5"		
Shank (Qty.)	6	6	8		
Shank Tube	4" x 6" x ½"				
Cutting Edge (x2)	Hardened ½" - Reversible 1" Adjustments				
Skid Shoes	3/8" x 2 Reversible				
Cylinder	Dual Hydraulic Cylinders for shank rotation				
Weight (LBS.)	1,140	1,240	1,350		

NOTE: Hitch must be ordered separately.

Options	Part #	Weight (LBS.)
Optional Skidsteer Adapter	MKLPSSMNT	156
Optional 3PH Adapter (Cat. 1 & 2)	MKLP3PTMNT	36

Grader Blades





FEATURES

- Five Stops of angle adjustment (Each Forward and Back)
- Full Turn Around
- ½" x 6" Reversible Cutting Edge
- 3/8" Mouldboard (98 Series)
- Quick hitch compatible

SPECIFICATIONS

Model	Max. HP	Width	Mouldboard	Mouldboard Height	Center Pin	Max angle position	Width when Angled	3PH Mount	Weight (LBS.)
MKGB588	45	5'	3/16"	15"	2"	45 deg Left/Right	42"	Cat. 1	180
MKGB688	45	6'	1/4"	15"	2"	45 deg Left/Right	50"	Cat. 1	200
MKGB788	45	7'	1/4"	15"	2"	45 deg Left/Right	59"	Cat. 1	215
MKGB798	75	7'	3/8"	15"	3"	45 deg Left/Right	72"	Cat. 2	577
MKGB898	75	8'	3/8"	15"	3"	45 deg Left/Right	82"	Cat. 2	616

Model	Description
MKGB88ANG16	Hydraulic Angle - Includes the Hydraulic Cylinder and Hoses
MKGB98ANG	Hydraulic Angle - Includes the Hydraulic Cylinder and Hoses

Offset Tilt Grader Blades





FEATURES

- Angle Manual Adjustment
- · Offset Manual Adjustment
- Tilt Manual Adjustment
- 180° Reversible
- Bolt-On Cutting Edge
- Park Stand

SPECIFICATIONS

Model	MKGB5880T	MKGB6880T	MKGB7880T			
HP	30 - 50	30 - 50	30 - 50			
Hitch	Cat. 1	Cat. 1	Cat. 1			
Width	60"	72"	84"			
Weight (LBS.)	250	258	270			
Reverse	Yes	Yes	Yes			
Mouldboard	1/4"	1/4"	1/4"			
Mouldboard Height	15"	15" 15"				
Cutting Edge		3/8 x 6 Reversible				
Angle (Control)	Manual	Manual Manual				
Angle (Position)	5 Forward / 5 Reversed					
Offset Adjust	5 Positions	5 Positions	5 Positions			
Tilt Adjust	5 Positions	5 Positions	5 Positions			
Offset	24" left / 24" right	24" left / 24" right 24" left / 24" rig				
Max angle position	45 deg Left/Right	45 deg Left/Right 45 deg Left/Right				
Width when Angled	42"	50" 59"				

RUBBER CUTTING EDGE

These optional rubber cutting edges are ideal for snow removal, reducing damage to driveways.



(Optional on Light Duty, Standard, & Offset Tilt Grader Blades)

Model	Description			
MKGBRCE5	5' Rubber Cutting Edge Kit			
MKGBRCE5.5	5.5' Rubber Cutting Edge Kit			
MKGBRCE6	6' Rubber Cutting Edge Kit			
MKGBRCE7	7' Rubber Cutting Edge Kit			
MKGBRCE8	8' Rubber Cutting Edge Kit			
MKGBRCE9	9' Rubber Cutting Edge Kit			
MKGBRCE10	10' Rubber Cutting Edge Kit			

HYDRAULIC KIT

Includes hoses, cylinders, bolt-on plates, hardware.



Model	Description
MKGBOTAng	Angle Kit
MKGBOTTilt	Tilt Kit

XD Grader Blades





FEATURES

- Extreme Duty Grader Blade
- Available up to 14' grading path
- For tractors up to 250 HP
- Hydraulic cylinders control the blade angle, blade tilt and offset of the arm



FEATURES







ANGLE

TILT

HYDRAULIC HYDRAULIC HYDRAULIC **OFFSET**

SPECIFICATIONS

Model	MK8XD-100	MK9XD-100	MK9XD-150	MK10XD-150	MK12XD-250	MK14XD-250
Horse Power (Max.)	100	100	150	150	250	250
3PH Mount			Cat.	2 & 3		
Mouldboard Thickness		5/1	6"		3/8"	3/8"
Mouldboard Width	96"	108"	108"	120"	144"	168"
Mouldboard Height		20)"		20"	20"
Offset Adjustment	27" left or right (hydraulic)					
Adjustment Angle	32° left or right (hydraulic) 37° left or right (hydraulic)				ht (hydraulic)	
Adjustment Tilt	13° blade adjustment (hydraulic)					
King Pin	3-1/2"	3-1/2"	4"	4"	5"	5"
Cutting Edge	High Carbon ½" x 6" (reversible)					
Weight (LBS.)	1,572	1,666	1,695	1,745	1,925	2,075

Part #	Description	Weight
MKGBXD-TW	Tail Wheel Kit	310 lbs.
MKGBXD-EP	Box End Plates	
MKGBXD-SK	Skid Shoe Kit	



TAIL WHEEL KIT




BOX END PLATES



SKID SHOE KIT

Land Levelers



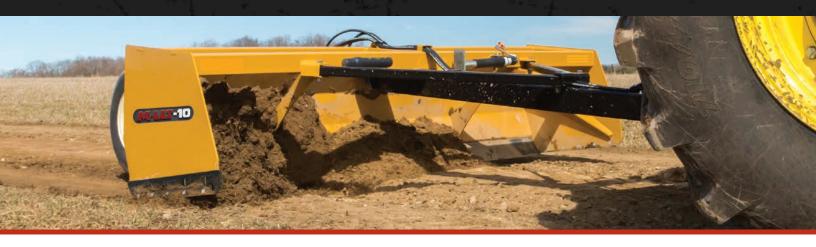

These rugged scrapers come in a range of sizes from 8 to 12 feet to fit your needs and your equipment. Standard on all models is our 1/2 inch thick reversible hardened cutting edge, ready to smooth out the bumps and fill in the hollows. Cutting depth is controlled by a 3"x12" hydraulic cylinder so you can decide how much of a bite to take and adjust on the go. All models are well suited for feedlot and soil reclamation or swale cutting.



TRAILED MODEL SPECIFICATIONS

Trailed Models	LLT-8	LLT-10	LLT-12
Width	8'	10'	12'
Mount	Hitch	Hitch	Hitch
Horse Power (Max.)	165	165	165
Tilt	Yes	Yes	Yes
Cutting Edge	Single	Single	Single
Side Plate	3/8"	3/8"	3/8"
Mouldboard	1/4"	1/4"	1/4"
Mouldboard Height	30"	30"	30"
Mouldboard Depth	32"	32"	32"
Wear Plate	NA	NA	NA
Skidbar	½" Reversible	½" Reversible	½" Reversible
Weight	1,555	1,771	1,898

FEATURES

- 1/2" x 6" reversible hardened cutting edge
- Equipped with a 15" jack
- 3" x 12" hydraulic lift cylinder
- 3" x 6" cylinder to tilt 10° each way
- GPS Mount ready





ADJUSTABLE SKID BARS



TILT INDICATOR



TRANSPORT LOCK

Grader Levelers







Top View



FEATURES

- Two 1/2" x 6" Reversible Cutting Edges
- 3/8" x 2 Reversible Skid Shoes
- Cutting edges can be manually adjusted to your desired cutting depth for optimal performance
- Order Mount separately (3PH or Skidsteer Adapter)
- AR400 Abrasion-Resistant Skid Shoes

OPTIONS

 Mount – Select the correct mount for application at time of order

SPECIFICATIONS

Model	Working Width	Overall Width	Skid Shoes	Mouldboard Thickness	Cutting Edge	Weight (LBS.)
MKGL578	60"	65"	3/8" x 2 Reversible	1/4"	1" Adjustment	600
MKGL678	72"	77"	3/8" x 2 Reversible	1/4"	1" Adjustment	665
MKGL778	84"	89"	3/8" x 2 Reversible	1/4"	1" Adjustment	730
MKGL878	96"	101"	3/8" x 2 Reversible	1/4"	1" Adjustment	796

NOTE: Hitch must be ordered separately.

Options	Part #	Weight (LBS.)
Optional Skidsteer Adapter	MKGLSSMNT	156
Optional 3PH Adapter (Cat. 1 & 2)	MKGL3PTMNT	36

Angled Grader Levelers







Top View



FEATURES

- Two angled 1/2" x 6" Reversible Cutting Edges
- Cutting Edge Angled between 5° 9° depending on model
- 3/8" x 2 Reversible Skid Shoes
- Cutting edges can be manually adjusted to your desired cutting depth for optimal performance
- Order Mount separately (3PH or Skidsteer Adapter)
- AR400 Abrasion-Resistant Skid Shoes

OPTIONS

 Mount – Select the correct mount for application at time of order

SPECIFICATIONS

Model	Working Width	Overall Width	Skid Shoes	Mouldboard Thickness	Cutting Edge	Cutting Angle (Deg.)	Weight (LBS.)
MKGL578A	60"	65"	3/8" x 2 Reversible	1/4"	1" to -0.5"	9	568
MKGL678A	72"	77"	3/8" x 2 Reversible	1/4"	1" to -0.5"	7	632
MKGL778A	84"	89"	3/8" x 2 Reversible	1/4"	1" to -0.5"	6	697
MKGL878A	96"	101"	3/8" x 2 Reversible	1/4"	1" to -0.5"	5	761

NOTE: Hitch must be ordered separately.

Options	Part #	Weight (LBS.)
Optional Skidsteer Adapter	MKGLSSMNT	156
Optional 3PH Adapter (Cat. 1 & 2)	MKGL3PTMNT	36

Landscape Rakes





FEATURES

- Cat. 1 Quick Tach compatible
- 5/16" x 1" x 15.25" spring tines
- 5 forward and 3 reverse positions with manual adjustment


OPTIONS

Part #	Description
MKGB88ANG16	Hydraulic Angle Kit
MKLRWK	Gauge Wheel Kit

OPTIONAL GAUGE WHEEL KIT

Model	MKLR4	MKLR5	MKLR6	MKLR7	MKLR8
Width	4'	5'	6'	7'	8'
MAX HP	50	50	50	50	50
Weight (LBS.)	246	250	263	285	302
Tines	24	30	36	42	48
Max Angle	45°	45°	45°	45°	45°
Width at Max Angle	32"	41"	50"	57"	66"



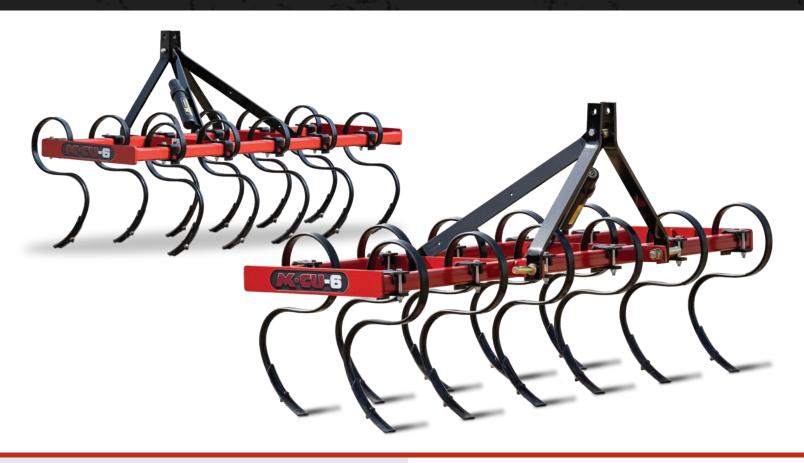

FEATURES

- Adjustable S-tine configuration
- Ideal for cultivating small fields and gardens

OPTIONAL BOLT-ON 7" SWEEPS





SPECIFICATIONS

Model	CU-5	CU-6	CU-7
Working Width	60"	72"	84"
Overall Width	60-1/2"	72-1/2"	84-1/2"
Weight (LBS.)	164	193	222
Tines (Heat Treated)	9 tines	11 tines	13 tines
3PH Mount	Cat. 1	Cat. 1	Cat. 1



OPTIONAL GAUGE WHEEL KIT

		Part #		
		CUWK		

(4" depth adjustment, 2.5"x12" rubber wheel)

Track Curry







FEATURES

- Two rows of adjustable S-Tines
- Adjustable Leveling Bar
- 12" Rolling Drum (adjustable)
- Spill Plates direct material into the working width
- Quick Hitch Compatible

- Wing levels and reclaims material around the edge of arenas
- Scarifier Bar Used for working up hard pack
- Sprinkler Kit



SPILL PLATES

Every MK Martin Track Curry comes with two standard spill plates. These funnel any excess material into the Track Curry's path, ensuring your arena or track keeps looking its best.



SPECIFICATIONS

Model	TC-5	TC-6	TC-7	TC-8
Working Width	5'	6'	7'	8'
Number of Shanks	13	15	17	19
Shank Size		1-1/4" x 3/8	3" x 22"	
Shank Clearance	16"	16"	16"	16"
3PH Mount	Cat. 1	Cat. 1	Cat. 1	Cat. 1
HP Rating	18 - 32	22 - 39	26 - 47	30 - 53
Weight (LBS.)	460	530	640	725

Leveling Bar ½" x 6" (double beveled)



WING

The optional Track Curry wing from MK Martin easily levels the edge of the riding arena for a clean and professional look.

OPTIONS

Part #	Option
TC Wing	Track Curry Wing
TCSA5	5' Scarifier Bar
TCSA6	6' Scarifier Bar
TCSE12	12" Scarifier Extension (x2)
TCSK	Sprinkler Kit
TCSE12	12" Scarifier Extension (x2)



SCARIFIER BAR

Dig deeper with the optional scarifier bar. Each shank on the scarifier bar is height adjustable, or can be removed or inverted for the right amount of action.



SPRINKLER KIT

Equipped with a 25 gallon tank, the optional sprinkler kit reduces the amount of dust being thrown into the air when working with dry material.

For 7 & 8 foot scarifier bars please order the following parts combinations to match your width.

Width	Combine
7 foot	TCSA5 + TCSE12
8 foot	TCSA6 + TCSE12

3PH Rotary Tillers







FEATURES

- Replaceable Bolt-On Tines
- Self Lubricating Chain Drive
- Adjustable Skidshoes
- Floating Deflector
- Gear Box
- 3PH Mount Offset
- Slip Clutch

Models	MKRT486	MKRT546	MKRT606	MKRT726
Horsepower	15-30 HP	20-40 HP	20-50 HP	25-60 HP
Hitch	Cat. 1	Cat. 1	Cat. 1	Cat. 1
Inner Width (in.)	50	54	58	74
Overall Width (in.)	55.375	59.375	63.375	79.375
Weight (lbs.)	491	514	525	636
Number of Flanges	6	6	7	9
Tines/Flange	6 (C-Shape)	6 (C-Shape)	6 (C-Shape)	6 (C-Shape)
Flange Spacing (in.)	7.75	7.75	7.75	7.75
Max Tillage Depth (in.)	6.5	6.5	6.5	6.5
Number of Skid Shoe Settings	5	5	5	5
Rotor Diameter (in.)	17"	17"	17"	17"
Rotor Speed @ 540 PTO (RPM)	211	211	211	211
Gearbox (HP)	50HP @ 540	50HP @ 540	50HP @ 540	50HP @ 540
Drive Chain	#80	#80	#80	#80

Hydraulic Rotary Tillers







FEATURES

- Skid steer attachment plate
- 74" working width
- 9 tine flanges
- 6 tines per flange
- Working depth 6.5"
- 17" rotor

SPECIFICATIONS

Models	MKRT726HYD-SF	MKRT726HYD-HF
Flow	Standard	High Flow
Hitch	Skidsteer Attachment Plate	Skidsteer Attachment Plate
Inner Width (in.)	74	74
Overall Width (in.)	79.375	79.375
Weight (lbs.)	725	725
Number of Flanges	9	9
Tines/Flange	6 (C-Shape)	6 (C-Shape)
Flange Spacing (in.)	7.75	7.75
Max Tillage Depth (in.)	6.5	6.5
Rotor Diameter (in.)	17"	17"
Drive Chain	#80	#80

	Flow Rates
Standard	16-28 GPM
High Flow	28-40 GPM

To ensure optimum performance, hydraulic output must match motor package.

Garden Hillers With Plow









FEATURES

- Garden Hiller and Plow combination attachment
- Discs can be easily relocated to quickly change from plowing action to hilling action
- Shanks & sweeps keep soil loose after tractor compaction
- Adjustable disc height and horizontal spacing
- Discs angle is adjustable
- 2x2 steel tube construction
- · Steel storage stand

Model	MKGH60
Width	60"
Hitch	Cat. 1
Disc	14"
Weight	100 lbs.

Potato Diggers





FEATURES

- Fits Cat.1 3ph tractors
- Tow-Behind Design with rear discharge
- 5 adjustable plowshare digging depths
- Adjustable sieve tine basket
- Reverberating camshaft
- Adjustable wheel base
- Anti-vibration rubber bushings
- Lower lift pins and top link pin included

01 11011 10111	10110
Model	MKPD20
Working Width	19"
Overall Width	41 13/16"
Overall Length	51 ½"
Overall Height	38 3/8"
Digging Depth	11"
PTO	540 RPM
3PH Mount	Cat.1
HP Requirements	18HP (min) - 35 HP (max)
Weight	340 lbs.
Wheels	17", adjustable air-filled
Wheel adjustment	2 positions to adjust dig depth

Trailer Backhoe










MKBT810	Standard Setup
Engine HP	14 HP Gasoline
Start up	Electric
Digging Force	800 kg/1,764 lbs
Bucket Reach	204 cm / 6' 8"
Working Depth	160 cm / 5 ft 3 inches
Tongue Weight	113 kg / 250 lbs
Lifting Capacity	200 kg / 440 lbs
Total Weight	600 kg / 1323 lbs
Total Reach of Boom	270 cm / 8' 10"
Hydraulic Pressure	16 MPA / 2,320 psi
GPM	7.5 GPM at 1800 RPM







14HP GASOLINE ENGINE

5 FOOT WORKING DEPTH

360 DEGREE ROTATION



ELECTRIC START



CURVED BOOM DESIGN



12" & 18" BUCKET WITH MECHANICAL THUMB





Model		MKGW3200			MKGW5000	
Extension	N/A	8"	19"	N/A	8"	12"
Capacity (Bushels)	335 bu	395 bu	480 bu	520 bu	595 bu	635 bu
Hopper Construction	000 20	14 GA.	.00 50	020 50	12 GA.	000 50
Under Structure	3" x 6'	x .188 wall rectangul	ar tube	.188	4" x 8" " wall rectangular tul	oing
Unloading Door		45" width		2	57" width (standard) 28" width x2 (divider)	
Chute Height		17"-20"			17"-21"	
Box Dimensions						
Length	158"	158"	158"	196"	196"	196"
Width	96"	96"	96"	101"	101"	101"
Height (less wagon)	78"	86"	98"	89"	98"	101"
Height (wagon & 22.5" wheel)	102"	110"	122"	123"	131"	135"
Weight (LBS.)	1,980	2,130	2,270	3,610	3,845	3,915
Wheel Base		112"			142"	
Suggested Wagon	975 H	orst Wagon - 425/22.	5 Tires	365 Ha	orst Wagon - 425/22.	5 Tires
ouggested waguii	2/3/1	0131 Way011 - 423/22.	0 11103	303110	1131 Wayon - 423/22.	0 11163

Suggested wagon	275 HUIST Waguit - 425/22.5 THES	300 HUIST Waguii - 420/22.0 Tiles

WAGON OPTIONS

Part #	Description
horstWA-BR2WDI	Brakes
horstWA-SBD	Spring Balancer (Double)

^{*} Wagon options not included in list price. Wagon options are available at an additional cost. Bushel capacities were verified with dry corn tested at 56 lbs./bu.





Model		MKGW6500		MKGW12000
Extension	N/A	8"	12"	N/A
Capacity (Bushels)	690 bu	785 bu	835 bu	1,200 bu
Hopper Construction		12 GA.		12 GA.
Under Structure		4" x 8" 188" wall rectangular tub	ing	4x8x.25w
Unloading Door		57" width (standard) 28" width x2 (divider)		15" length x 47" width X 2
Chute Height		16"-20"		18" (Side Discharge)
Box Dimensions				
Length	229"	229"	229"	315"
Width	115"	115"	115"	110"
Height (less wagon)	91"	99"	103"	136"
Height (wagon & 22.5" wheel)	125"	133"	137"	156"
Weight (LBS.)	4,645	4,915	5,005	17,500
Wheel Base		156"		215"
Suggested Wagon	485	Horst Wagon - 425/22.5	Tires	608 Horst Wagon- 425/22.5 Tires (with brakes)

^{*} Wagon options not included in list price. Wagon options are available at an additional cost. All wagons come with used 425 truck tires. Tarp kit is included in the price for the 12000 model.

Gravity Box Options





HYDRAULIC DOOR OPENER

Part # MKGW- HYD Door	Description
MKGW50HD	Hydraulic Door Opener (MK5000)
MKGW65HD	Hydraulic Door Opener (MK6500)



The Hydraulic Door allows you to conveniently control the metering of the material using a remote from your tractor.

DIVIDER KIT

Part #	Description
MKGW32DIV	Center Divider (MK3200)
MKGW50DIV	Center Divider (MK5000)
MKGW65DIV	Center Divider (MK6500)





The optional divider splits your Gravity Box ①, allowing for two separate commodities to be in the box at the same time. Each side also has it's own door for individual unloading and metering ②.

UNLOADING AUGER

Adjustable hopper attaches to the exit door. Available in either stainless or black powder coated down spout.

Part #	Description
MKGWAT6X16	6" x 16' auger with cupped steel flighting & telescopic down spout.
MKGWAT8X16	8" x 16' auger with cupped steel flighting & telescopic down spout.
MKGWATSS6X16	6" x 16' stainless steel auger with cupped flighting & telescopic down spout
MKGWATSS8X16	8" x 16' stainless steal auger with cupped flighting & telescopic down spout









GRAIN SHIELD TARP KIT

Part #	Capacity
MKGW32TS	320-450
MKGW50TS	500-610
MKGW65TS	645-800

^{*} Comes standard on MKGW12000 model.



This ratchet-free locking system not only protects the contents from blowing away and from inclement weather, but also locks quickly and easily so you can head out sooner.

REAR LADDER KIT

Part #	Description
MKGW32LAD	Fits 3200 Models
MKGW50LAD	Fits 5000 & 6500 Models



The optional rear ladder gives another access point for operators to look into the Gravity Box.

CENTER DUMP

Part #	Description
MKGW32CD	Center Dump for 3200
MKGW65CD	Center Dump for 5000 & 6500



The optional center dump directs the unloading material beneath the gravity box, ideal for when the unloading area isn't wide enough for standard side dumping.

Field Roller





FEATURES

- Working width of 34 feet, 36 feet, 41 feet and 46 feet
- 36 inch drum diameter
- · Half inch wall thickness for extra durability
- Weight per foot ranging from 475 lbs to 453 lbs
- Narrow transport width of 164"
- Forward fold design allows for quick setup and fold up
- Mud scraper on the backside prevents mud build up on the drums
- Made in Canada and backed by our 7 year warranty
- Road Lights











1/2 INCH THICK DRUM

34' - 46' WIDTHS

36" DRUM DIAMETER









FORWARD FOLD DESIGN

MUD SCRAPER

NARROW TRANSPORT WIDTH

3" DRUM SHAFT & BEARING

Models	R3436	R3636	R4136	R4636
Field Working Width	34'	36'	41'	46'
Min. Req. HP	140 HP	144 HP	164 HP	184 HP
Frame Sections	11.5' -12' - 11.5'	12.5' -12' - 12.5'	15' -12' - 15'	17.5' -12' - 17.5'
Section Overlap	5"	5"	5"	5"
Machine Weight	16,190 lbs	17,275 lbs	19,055 lbs	20,855 lbs
Weight Per Foot	475 lbs	479 lbs	464 lbs	453 lbs
Drum Dia.	36"	36"	36"	36"
Drum Wall Thickness	1/2"	1/2"	1/2"	1/2"
Center Frame Transport Cylinder	5" x 48" cylinder	5" x 48" cylinder	5" x 48" cylinder	5" x 48" cylinder
Wing Boom Cylinder	4" x 48"	4" x 48"	4" x 48"	4" x 48"
U-Joint & Pivot Pin Diameter 2" w/ Maintenance Free Composite Bushings				
Drum Roller Shaft Diameter	3"	3"	3"	3"
Transport				
Dimensions	164"W x 270"L x 150"H			
Tires (4)	12.5LX15FI	12.5LX15FI	12.5LX15FI	12.5LX15FI

Weight Boxes





FEATURES

- 3.5 cu. ft. internal volume
- 525 lbs maximum holding weight
- Cat. 1 & 2 3PH compatible
- Tool holder
- Clean out hatch
- 2" Hitch receiver



Model	MKWB
Hitch Type	Cat. 1 & 2
Box Volume	3-1/2 cu ft
Max Weight (box and fill) (LBS.)	575
Max Weight (fill only) (LBS.)	525
Quick Hitch Compatible	Yes
Max 2" Receiver Load (LBS.)	500
Shipping Weight (LBS.)	104

Fill Type	Weight Per Cubic Foot (lbs.)
Concrete	150
Gravel	110
Sand	100

Disc Mower Implement Caddy





FEATURES

- Ratchet adjustment standard
- Inline or offset caddy
- · Height adjustable clevis hitch
- Includes toplink
- Adjustable (width) lower points
- Maximum load 1,600 lbs.



ADJUSTABLE HITCH

Adjust the hitch to ensure your mower is level.

SPECIFICATIONS

Model	MKC1200	MKC1201
Weight (LBS.)	1,900	1,835
Max Implement Weight	1,600 lbs.	1,600 lbs.
Lift Cyl.	3x8	3x8
Tires	11L 15	11L 15
Main Frame	7x7 Tube	7x7 Tube
RPM	540	540
Driveline	#5	#5

OPTIONS

- Hydraulic adjustment
- Inline hydraulic lock for transport



HYDRAULIC (OPTION)

Hydraulically lifts the mower up and down.

Part #	
Hydraulic Lift	



Effective on products retailed on or after October 1, 2022

Seven Year Limited Consumer Warranty 90 Day Limited Commercial Warranty including Gearboxes

Commercial includes rental and industrial applications.

Warranty begins at the time of customer delivery and is activated upon warranty registration receipt at MK Martin Enterprise Inc.

Warranty coverage is null and void unless the Warranty Registration form has been completed in full and is on file at MK Martin Enterprise Inc.

Keep your registration copy in a safe place, it is required as proof of warranty activation.

This new and unused product is warranted by MK Martin Enterprise Inc. to be free from defects in material and workmanship under normal use and regular service as described in the owner's manual, for a consumer period of 7 years from the date of delivery, and commercial period of 90 days, including gearboxes, from the date of delivery. Warranty is limited to the replacement of parts and / or repair of the product.

If issues develop within the warranty period with the product, contact the local dealer from which you purchased the unit. Only MK Martin authorized dealers may make repairs to the product or affect the replacement of defective parts, unless otherwise approved by MK Martin. Repairs / replacement will be done at no charge within a reasonable time after the receipt of the product. This warranty does not cover the following items:

- 1. Normal replacement of service items.
- 2. Normal maintenance or adjustments.
- 3. Machines or parts lost or damaged during shipment,
- 4. Accessory items / parts not supplied by MK Martin
- 5. Damages resulting from: misuse, negligence, accident, theft or fire use of improper or insufficient fuel, fluids or lubricants use of aftermarket parts or accessories, unless approved by MK Martin modifications, alteration, tampering or improper repair any device or accessories installed other than an authorized dealer.
- 6. Tires are covered by the manufacturer of the tire and the warranty period specified by that manufacturer. Please contact the tire manufacturer for warranty on these items.

MK Martin Enterprise Inc. shall not, in any event, be liable for any losses, damages or costs; to include profits, travel, transportation, pick up, delivery, towing cost, tow vehicle, loss of use, whether special, incidental, consequential or otherwise, in any way. Unit or parts are returned at the customer's expense.

Include a copy of your completed Warranty Registration form with any claim as proof of warranty activation. There are no warranties, expressed or implied, other than those specified herein. No agent, employee or other person has any authority to vary any of the foregoing provisions.

Warranty coverage is null and void unless the Warranty Registration form has been completed in full and is on file at MK Martin Enterprise Inc. Warranty begins at the time of customer delivery and is activated upon Warranty Registration receipt at MK Martin Enterprise Inc.


Custom/Standard Colors / Setup Fees

Standard Colors

Product	Standard Color	
Gravity Box	Red, Green, or Blue	
Snow Blowers	Charcoal or Red	
Commercial Blowers/Throwers	Charcoal, Industrial Yellow	
Rotary Cutters & Mowers	Charcoal, Industrial Yellow	
Axis Tool Arms	Charcoal	
Box Grader & Grader Blades	Charcoal	
XD Grader Blades	Industrial Yellow	
Land Leveler	Industrial Yellow	
Grader Leveler	Industrial Yellow	
Land Plane	Industrial Yellow	
Track Curry	Industrial Yellow	
Rotary Tiller	Charcoal	
Landscape Rake	Charcoal	
Cultivators	Charcoal	
Weight Box	Charcoal	
Dump Box	Charcoal	

Custom Colours

Custom tractor match colours will be provided at no extra charge.



Setup Fees

Any other setup charges not listed will be subject to a rate of \$75.00/hr.

E&OE Errors and omissions excepted November 2024. Pricing and specifications printed in this catalogue are current at printing and may be subject to change without notice. For current information on all of our products, please contact MK Martin directly.













3950 Steffler Rd., Elmira Ontario, N3B 2Z3

Toll Free: 855-664-2752
Tel: 519-664-2752
Email: sales@mkmartin.ca

www.mkmartin.ca

Authorized Dealer